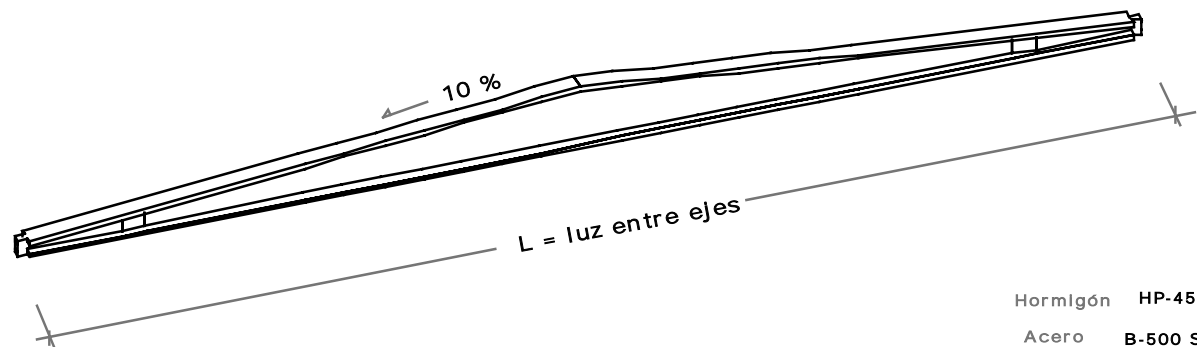
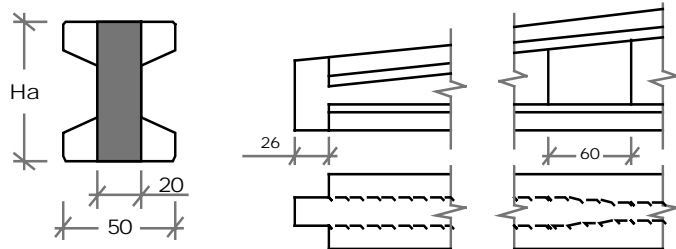
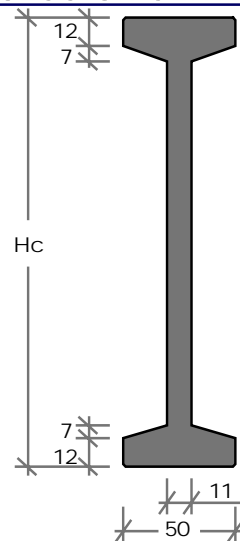


**VIGAS TIPO DELTA****SECCIÓN EXTREMO CON ENCAJE EN CABEZA PILAR****SECCIÓN CENTRO****FOTO****CARACTERÍSTICAS TÉCNICAS VD50-LUCES IMPARES**

Luz entre ejes L (m)	11	13	15	17	19	21	23	25	27
Altura en centro Hc (cm)	120	120	130	140	150	160	170	180	190
Altura en apoyo Ha (m)	65	55	55	55	55	55	55	55	55
Peso propio Pp (kN)	64,0	75,00	89,00	102,00	116,00	130,00	145,00	160,00	176,00
Resistencia al fuego (min)	R 90								

CARACTERÍSTICAS TÉCNICAS VD50-LUCES PARES

Luz entre ejes L (m)	12	14	16	18	20	22	24	26	28
Altura en centro Hc (cm)	120	120	130	140	150	160	170	180	190
Altura en apoyo Ha (m)	60	50	50	50	50	50	50	50	50
Peso propio Pp (kN)	70,00	81,00	94,00	108,00	122,00	136,00	151,00	166,00	182,00
Resistencia al fuego (min)	R 90								